

QUALITY FROM AUSTRIA



HL HUTTERER & LECHNER GMBH

EASY & SAFE



Technical data:

Installation height: 80 – 250 mm

Capacity: 0.5 l/s

Cover dimensions: Ø 113mm

E A S Y & S A F E



Drain separated in drain body set, tiler set and the completion set.



Safe access to the drain pipe through the removable siphon cartridge.



Easy installation through height adjustable drain body, belated height adjustment.



Possibility to check for moisture formation below the tray after installation.



The flex element (blue) permits the product to compensate a lateral deviation of up to 4 cm between the drain body and the shower tray.




On the one hand, the flex element ensures the leakproof connection to the drain body through lip seals as well as its round construction. On the other hand, the flex element also guarantees the safe integration into the moisture proofing compound.



HL570 FlexBox Completion Set

HL570 FlexBox Completion Set

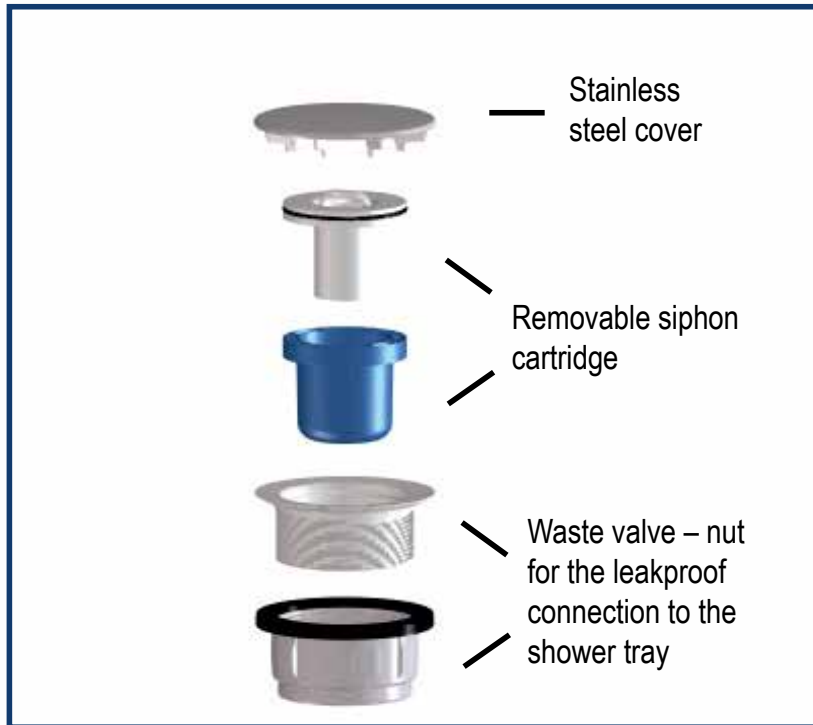

Completion Set

Sealing set: is integrated into the drain body with lip seals and is connected to the surrounding sealing. A flexible bellows enables a belated shift of the shower tray to up to 40 mm.



Drain body set: The drain body sits on the raw concrete. The gradient of the drain pipe can be adjusted by angles. Minimum installation height: 80mm

HL Hutterer & Lechner GmbH
Brauhausgasse 3-5, A-2325 Himberg, Austria
T: +43 / (0)2235 / 862 91-0
F: +43 / (0)2235 / 862 91-31
office@hl.at
www.hl.at